

Puertas Acorazadas Normalizadas

Portes Fortes Normalisées Standard Vault Doors




Nivel Clase Grade	Modelo Modèle Model	Certificado Certification Certification
III	PF-100 (TS-100, PF+TS-100)	PR-0181/007
IV	PF-100 (TS-100, PF+TS-100)	PR-0182/007
V	PF-100 (TS-100, PF+TS-100)	PR-0183/007
VII	PF-150	PR-0172/007
VIII	PF-150	PR-0173/007
VIII	PF-300	PR-0184/007
IX	PF-400	PR-0174/007
X	PF-500	PR-0185/007



■ La serie de Puertas Acorazadas de FERRIMAX ha sido desarrollada para cumplir la norma de ensayo para puertas acorazadas EN 1143-1, obteniendo los niveles de seguridad III, IV, V, VII, VIII, IX y X.

■ La série de Portes Fortes de FERRIMAX répond aux exigences de la norme européenne des essais EN 1143-1, obtenant les classes de sécurité III, IV, V, VII, VIII, IX et X.

■ FERRIMAX Vault Doors have been developed to comply with the EN 1143-1 European standard, obtaining the grades III, IV, V, VII, VIII, IX and X.

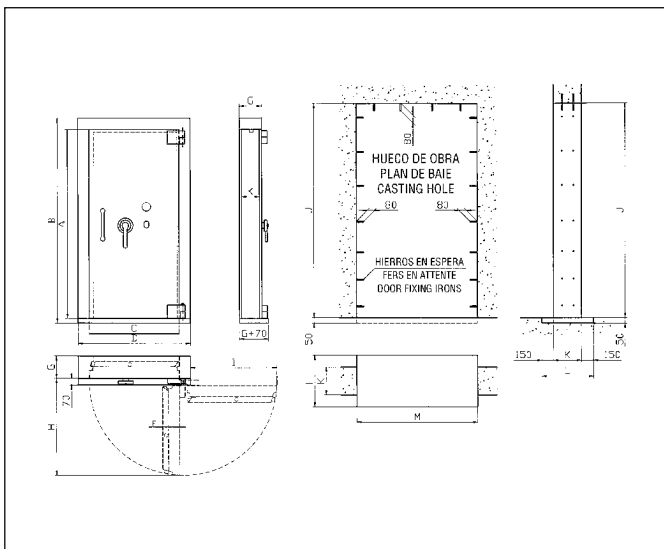

Modelo Modèle Model	Niveles Classes Grades	Dimensiones · Dimensions · Dimensions (mm)												Paso útil Passage libre Free clearance	Peso aprox. Poids approx. Approx. weight (kg)
		A	B	C	D	F	G	H	I	J	K	L	M		
P/A 100	III	2020	2140	960	1100	150	175	1040	970	2300	150	450	1360	2000 x 900	550
	IV														600
	V														755
P/A 150	VII	2030	2200	970	1210	190	240	1050	935	2350	200	500	1500	2000 x 900	1100
	VIII														1400
P/A 300	VIII	2045	2275	1005	1365	310	350	1080	900	2450	300	600	1800	2000 x 900	1500
P/A 400	IX	2045	2275	1030	1410	410	450	1105	915	2450	400	700	1800	2000 x 900	2400
P/A 500	X	2045	2275	1070	1470	510	550	1145	950	2450	500	800	1800	2000 x 900	3000
T/A 100	III	540	700	450	610	150	175	490	405	830	-	-	850	500 x 395	90
	IV														105
	V														127
T/A 150	VII	590	835	580	825	190	240	660	545	1110	-	-	1380	515 x 530	260
	VIII														285
T/A 300	VIII	605	965	710	1070	310	350	790	605	1240	300	-	1600	605 x 505	440
T/A 400	IX	605	965	710	1070	410	450	790	605	1240	400	-	1600	605 x 505	490
T/A 500	X	605	965	710	1070	510	550	790	605	1240	500	-	1600	605 x 505	550